


TIMER

PS - PG - PJ

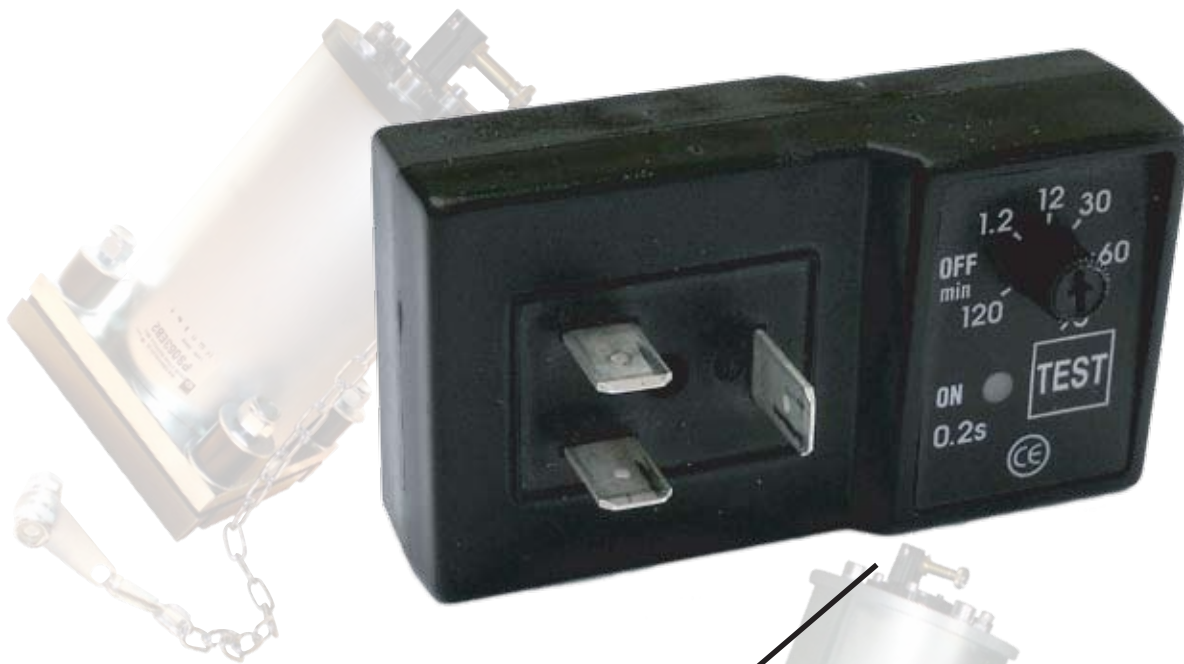

TECHNICAL SPECIFICATION

CYCLE TIME (OFF TIME)	FROM 1'20" TO 120' (as indicated on scale regulation)
DISCHARGE TIME (ON TIME)	0.2" (FIXED)
SUPPLY VOLTAGE	24 to 240V AC/DC 50/60Hz
CURRENT CONSUMPTION	4mA MAXIMUM
MANUAL TEST SWITCH	YES
INDICATORS	LED TO INDICATE ON
HOUSING MATERIAL	ABS PLASTIC FR GRADE
CONNECTION	DIN 43650-B / ISO 6952
OPERATING TEMPERATURE	FROM -40°C TO 60°C